






EQUIPMENT FOR DISHWASHERS





DISHWASHERS

- Dishwashers are designed to wash trays, plates, cups and cutlerys in the special designed cassettes for all catering services or cafeterias.
- Dishwasher machines with 500 to 6000 plate/hour capacities have opportunity to satisfy all facilities in different volumes.
- Easy to use, maintain and clean. No need to any extra maintenance except daily cleaning and can be used safely for years. In addition it saves labor, water, detergent and time costs.


BYK
CONVEYOR TYPE DISHWASHER

BYK 220L/R

Capacity: 1600-2000 pl/hr

With Conveyor, Without Prewash

1550 mm

BYK 220L/R
BYK 270L/R

Capacity: 2200-270 pl/hr

With Conveyor and Prewash

2150 mm

BYK 270L/R
BYK 360L/R

Capacity: 2800-3600 pl/hr

With Conveyor, Prewash, Double Rinse

2550 mm

BYK 360L/R

MODEL	OPTIONS
BYK-K70L	Drying Unit 70 cm, left
BYK-K70R	Drying Unit 70 cm, right
BYK-K90L	Drying Unit 90 cm, left
BYK-K90R	Drying Unit 90 cm, right
BYK-ID	Heat Transformation Unit
BYK-CD	Outlet hood

"Dishwashers are manufactured according to 50 °C water inlet. Extra boiler must be added on cold water feeds."


BYF
FLIGHT TYPE DISHWASHER


BYF 070L / R
Capacity: 3000 pl/hr
Washing + Double Rinsing
4450 mm (Without Dry)
4750 mm (Low Dry)

BYF 120L / R
Capacity: 3600 pl/hr
Prewash + Wash + Double Rinse
5050 mm (Without Dry)
5350 mm (Low Dry)
6000 mm (High Dry)

BYF 120PL / PR
Capacity: 4500 pl/hr
Prewash + Wash + Double Rinse
5400 mm (Without Dry)
5700 mm (Low Dry)
6350 mm (High Dry)

BYF 180L / R
Capacity: 5200 pl/hr
Prewash + Wash + Double Rinse
6300 mm (Without Dry)
6800 mm (Low Dry)
7250 mm (High Dry)

BYF 180PL / PR
Capacity: 6000 pl/hr
Prewash + Wash + Double Rinse
6650 mm (Without Dry)
7150 mm (Low Dry)
7600 mm (High Dry)

OPTIONS

(Not Included to the standard machines)

XB-MOD5A
High Dry 18Kw

XB-MOD9R
Heat Transformation Unit

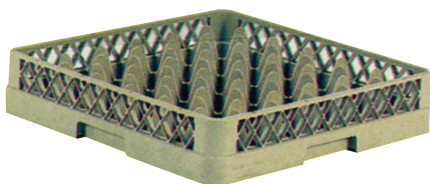
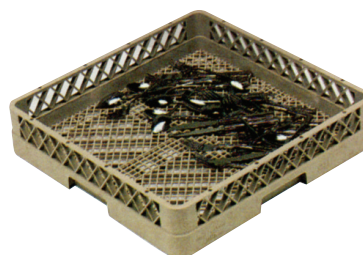
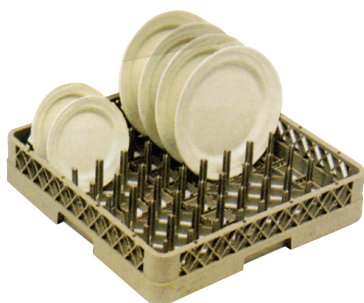
XB-BYF-TY
Self Service Tray Washing Difference

"Dishwashers are manufactured according to 50 °C water inlet. Extra boiler must be added on cold water feeds."

HOODS FOR DISHWASHER

MODEL	DIMENSIONS
DDB 353	3500X1170X500
DDB 403	4000X1170X500
DDB 453	4500X1170X500

DISHWASHER RACKS


BB-36
GLASS RACK / 36 SECTIONS

CKB
CUTLERY RACK

TB
PLATE RACK

CKB-8
CUTLERY RACK