

Front washers

The new DOMUS high, medium and low spin front washers offer an advanced design and technology, combined with a huge variety of accessories and options.

High G Factor, the touchscreen TOUCH II microprocessor with many features, connectivity, versatility.


They are designed to satisfy the laundry needs of the most varied businesses, always taking into consideration efficiency and productivity as main goals.



(\bigcirc)	HIGH SPIN WASH	ERS G FACTOR 450 HEATING	CAPACITY							
		HEATING	10-11 kg	13-14 kg	18-20 kg	25-28 kg	35-38 kg	45-50 kg	60-65 kg	120-133 kg
	TOUCH II Programmable Control	Electric, hot water and steam	DHS-11 Touch II	DHS-14 Touch II	DHS-18 Touch II	DHS-27 Touch II	DHS-36 Touch II	DHS-45 Touch II	DHS-60 Touch II	DHS-120 TOUCH II
	TOUCH II COIN Coin laundry	Electric and hot water	DHS-11 Touch II	DHS-14 Touch II	DHS-18 Touch II	DHS-27 Touch II	DHS-36 Touch II	-	-	-

$\overline{\bigcirc}$	MEDIUM SPIN W	ASHERS G FACTOR	300			
\subseteq	CONTROL TYPE	HEATING	CAPACITY			
			10-11 kg	13-14 kg	18-20 kg	25-28 kg
	TOUCH II Programmable Control	Electric, hot water and steam	DMS-11 Touch II	DMS-14 Touch II	DMS-18 Touch II	DMS-27 Touch II
	TOUCH II COIN Coin laundry	Electric and hot water	DMS-11 Touch II	DMS-14 Touch II	DMS-18 Touch II	DMS-27 Touch II

LOW SPIN WASH	ERS G FACTOR 200						
CONTROL TYPE	HEATING	CAPACITY					
		10-11 kg	13-14 kg	18-20 kg	25-28 kg	35-38 kg	60-66 kg
TOUCH II Programmable Control	Electric, hot water and steam	DLS-11 TOUCH II	DLS-14 TOUCH II	DLS-18 TOUCH II	DLS-27 Touch II	DLS-36 Touch II	DLS-60 Touch II
TOUCH II COIN Coin laundry	Electric and hot water	DLS-11 Touch II	DLS-14 Touch II	DLS-18 Touch II	DLS-27 Touch II	DLS-36 Touch II	DLS-60 Touch II

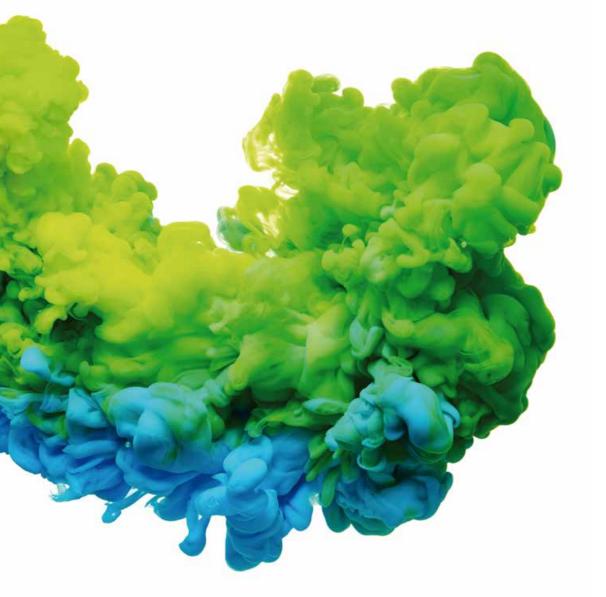

Front loading washer extractors

HIGH SPIN

MEDIUM SPIN







© DHS G FACTOR 450/350

HIGH SPIN RANGE

 Soft mounted washers, free standing
 Panels in skinplate
 R.P.M. between 678 - 1.231
 Easy to install, no needs of fixation to the floor, no extra costs
 Savings due to high extraction of water (45% residual humidity)

© DMS g factor 300

MEDIUM SPIN RANGE

- Hard mounted washers
- \bigcirc Anchoring to floor with anchoring base
- Panels in skinplate
- Savings due to high extraction of water (55% residual humidity)

*)

5

LOW SPIN



) DLS G FACTOR 200/150

LOW SPIN RANGE

 Hard mounted washers
 Anchoring to floor with anchoring base
 Panels in skinplate
 R.P. M. between 505-759
 Savings due to high extraction of water (65% residual humidity)

ECOENERGY

<u>In</u>

TOUCH II

- **TOUCH II**, user friendly and totally programmable microprocessor with a 7" touch screen and 29 preset programs
- **USB Connection.** PC software free of charge for programming, traceability, data analysis...
- Semote communication
- **⊘**Traceability standard
- ✓ Wet cleaning ready
- Videos on display: ads, instructions (useful for coin laundry)
- ✓ 8 dosing signals as standard + optional 6 extra dosing signals



VERSATILITY

✓ Make to order: customisation

New possibility to customise the machines from factory with the available options

OPL < > Coin / Token

Standard models easily transformable with coin/token kits

Steederd of ethic readels easily

Standard electric models easily transformable to hot water models

✓ Drain valve < > Pump

Standard models easily transformable Easy access and service

⊘ Wet cleaning

All washers have all features to use wet cleaning programs



✓ High G-FACTOR for all range of washers comparing with competitors

- **G-FACTOR 450** for High spin washers **G-FACTOR 300** for Medium spin washers
- G-FACTOR 200 for Low spin washers
- High G-Factor reduces residual moisture
- and drying time



CONNECTIVITY

⊘ Remote technical service

Machine monitoring, machine error warning, management for traceability and statistics. Remote desk and data recovery for technicians and maintenance, software update, etc.

$rac{O}{O}$ Management for laundries: OPL and COIN

Our DOMUS IoT solution allows you to manage your laundry business (i.e. create discount programs for customers, get statistics, traceability and laundry monitoring).

Remote payment: App for payments, cashless payment by scanning a QR code, promotions and machine booking



EFFICIENCY

✓ Water savings

- Possibility of configuring three levels of savings
- Optimal loading: manual indication of weight
- Sintelligent Consumption: automatic adjustment of water and soap consumptions (standard)
- ✓ Prepared to be connected to water recovery tanks EC0TA∩K
- \bigcirc Low water consumption
- Standard washing program consumes less than 7 liters of water per kg and cycle
- **⊘** High G-FACTOR 450 for High spin machines
- Reduced residual moisture > reduced drying time
- **Water RE-CYCLE** (recirculation of bath water)



ERGONOMICS

- ${igodot}$ Biggest door diameters in the market
- Helpful, mainly for big capacity washers, for loading and unloading operations
- Seasy opening/closing system for door lock
- **⊘** Plinths for 11, 14, 18, 27 and 36 kg models
- To align loading height (door base at 850 mm)



MAINTENANCE

- Hinged panel Easy and ergonomic access to control panel parts
- **⊘** Equivalent parts

Most key parts are the same for all models parts are same for all models (contactors, electronic devices, gear...)

\bigcirc Easy access to parts for reparability

Technical menu: traceability, error diagnosis, machine monitoring, software update...



Programmable microprocessor

TOUCH II

User friendly and totally programmable microprocessor with **7" touch screen** and **29 preset**

Configuration of washing and spinning speed

Regulable washing temperature from 20°C to 90 °C

Complete regulation of water levels

Standard WET CLEANING system

programs

Videos on display Ads, instructions

(useful for coin laundries)



8 dosing signals as standard + optional 6 extra dosing signals





USB Connection

PC software (Wash Control) free of charge for programming, traceability, data analysis... The new TOUCH II is a substantial evolution from the previous microprocessor which includes many more features mainly based on achieving more efficiency, versatility and connectivity among others.

37 languages

Available and easy to configurate, thanks to DOMUS aim to be accessible to everyone.



	LANGUAGE SELECTION	
	1 ESPAÑOL	
	2 ENGLISH	
	3 FRANÇAIS	
	4 DEUTSCH	
Þ	5 ITALIANO	
	×	~



G-FACTOR

DOMUS washer extractors. whether high, medium or normal spin, are the ones with the highest G-Factor in the market, which ensures minimum residual moisture, and this translates into less energy costs during the drying cycle.



High G-Factor reduces residual moisture and drying time



Water savings

Possibility of configuring three levels of savings

Low water consumption

A standard washing program consumes less than 7 litres of water per kg and cycle, and an ECO program up to 6 litres.

Water re-cycle

Optional kit to increase the care of the linen: recirculation of the bath water, which increases the water flow with chemicals, shortens the cycle and improves the effectiveness without mechanical action

High G FACTOR 450 for high spin machines

Reduced residual moisture > reduced drying time

ECOTANK

Ready to be connected to water recovery tanks

Domus washer extractors, with Touch II microprocessor and double drain, can be connected to the new Domus Ecotank which allows the water recovery, achieving important water and energy savings.





DOMUS washer extractors offer a wide variety of efficient features to make sure that the washing cycles use only the needed water and chemicals, not more.

Optimal loading

Intelligent consumption

Automatic adjustment of water and soap (standard)







To adapt to the needs of the different businesses and sectors with the smallest investment.

Make to order: customization

New possibility to customize the machines from factory with the available options

Electric <> Hot water

Standard electric models easily transformable to hot water models

Drain valve <> Pump

Standard models easily transformable Easy access and service

Wet Cleaning[™]

Thanks to DOMUS constant development, our models are equipped with the features to use WET CLEANING programs:

𝔆 Fully programmable TOUCH Ⅱ

- 𝔄 Total control of temperature and water levels
- Ø Programmable washing speed: very low (13 R.P.M.)
- 𝔆 Rhythm on/off 3seg/40seg
- ✓ Total control of dosing signal



DOMUS washer extractors between 10 and 36 kg are specially designed to be used in coin laundry businesses. This is available both for soft mounted machines DHS and hard mounted machines DMS and DLS.

OPL <> COIN

A new feature of Domus washers is its easy transformation from an OPL to a COIN machine. Three available options:

Coin / Token

There are several kits depending

on the currency of each country,

which can be used with a token

coiner kit. Both to be ordered

or with a new mechanical

with a coin box kit.



The machines can be connected to the central pay with the central pay kit to control a single box with money.





12











Remote payment

Machines ready for remote communication: allows programming, management and technical feedback. Multi payable systems: price updating, etc.



Open system

Domus equipment is prepared to work with any external payment system (by means of multi-point data).

CONNECTIVITY

Benefits for the dealer

Remote technical management

Machine monitoring. Machine error warning. Management for traceability and statistics. Remote desk and data recovery for technicians and maintenance. Software update. Renting of machines. Invoicing by cycles.

APP for the owner / dealer APP for the user of a laundry shop

Industrial/OPL laundry



Benefits for the owner

OP

Laundry management

Production and program/cycles. Working times. Management for traceability and statistics. Download of data in excel. Remote desk and data recovery for technicians and maintenance. Software update. Renting of machines.

Benefits for the owner

Coin laundry management

To monitor the business:

- create programs/discounts
- control of opening times
- control of income
- creation of machine groups (shops, models, etc.) Management for traceability and statistics. Download of data in excel.

Remote desk and data recovery for technicians and maintenance Software update. Renting of machines.

Location of machines registered all over the globe

IOT available in all **TOUCH II washers and** dryers. Connection by WIFI or Ethernet



THE INTERNET OF THINGS



Responsibe App, native for tablets and smartphones. **Offline version available**



COIN

Benefits for the user

Customizable app

according to type of customer: neighbourhood association, boarding schools, etc. Booking of machines: availability of free machines and booking. Cashless payment by QR code, promotions. Push notifications/contact by means of an e-mail. Year-to-date invoicing. Client fidelity by means of promotions, cards,

discounts, etc.



ERGONOMICS

As health and safety at work had become an important issue, our equipment is designed to be the most comfortable for the user.



MAINTENANCE

Biggest door diameters in the market

Helpful, mainly for big capacity washers, for loading and unloading the garments

Plinths for 11, 14, 18, 27 and 36 kg models

To align loading height (door base at 850 mm)

Easy opening/ closing system for door lock

Reversible door

Easy access for reparability

Washers are designed to offer an easy maintenance and reparability

Equivalent parts

Most key parts are the same for all models (contactors, eletronic devices, gear,...)

Technical menu

Machine monitoring, machine error warning, management for traceability and statistics. Remote desk and data recovery for technicians and maintenance, software update, etc.






One of DOMUS concerns is to make life easier for our clients. That includes offering quality equipment and parts of reputed brands, which demand little maintenance.

Hinged panel

Easy and ergonomic acces to the panel



Washer extractors technical data

(O) HIGH SPIN									
Ŭ	UNIT.	DHS-11	DHS-14	DHS-18	DHS-27	DHS-36	DHS-45	DHS-60	DHS-120
DRUM		8							
Load capacity (kg) 1:9 / 1:10	Kg	11/10	14/13	20/18	28/25	39/35	50/45	67/60	133/120
Volume	I	100	130	180	250	350	450	600	1200
Diameter	mm	532	620	700	770	860	918	1048	1360
Depth	mm	425	430	470	530	602	720	684	840
GENERAL DETAILS		120	100	170	000	002	720	001	010
Washing speed / Spining speed	r.p.m.	50/1.231	50/1.138	47/1.071	45/1.024	42,5/966	42,5/934	38/875	34/678
G Factor	-	450	450	450	450	450	450	450	350
Noise level	dB	< 70	< 70	< 70	< 70	< 70	< 70	< 70	< 70
Coin laundry version	-	YES	YES	YES	YES	YES	NO	NO	NO
Double drainage	-	EXTOPT	OPT.	OPT.	OPT.	OPT.	OPT.	OPT.	OPT.
Weighing System	-	OPT.	OPT.	OPT.	OPT.	OPT.	OPT.	OPT.	OPT.
Tilting System	-	NO	NO	NO	NO	NO	OPT.	OPT.	OPT.
SLUICE option	-	NO	NO	NO	NO	NO	NO	NO	NO
DOOR									
Height center door / Height base door	mm	630/370	700 / 440	765 / 450	865 / 560	885 / 540	1.190 / 830	1.190 / 830	1.330 / 900
Diameter	mm	373	373	460	460	560	560	560	700
POWER									
Motor	kW	0,75	1,1	2,2	4	4	7,5	11	15
Electric heating power	kW	6	9	12	18	21	28,8	36	-
Total electric power (electric model)	kW	6,25	9,4	12,75	19,2	22	31,3	40	-
Total electric power (steam model)	kW	0,75	1,1	2,2	4	4	7,5	11	15
CONNECTIONS									
Steam intake (steam mod.)	inch	1/2"	1/2"	1/2"	3/4"	3/4"	3/4"	3/4"	1-1/4"
Water intake	inch	3/4"	3/4"	3/4"	3/4"	3/4"	1"	1"	1-1/2"
Drain	inch	3"	3"	3"	3"	3"	3"	3"	4"
DIMENSIONS									
Width	mm	692	788	884	979	1.095	1.478	1.478	1.836
Depth	mm	788	869	913	1.041	1.184	1.444	1.444	1.863
Height	mm	1.185	1.307	1.415	1.553	1.598	1.945	1.945	2.245
Net weight	kg	230	250	360	490	750	1.350	1.400	3.950
PACKING DIMENSIONS									
Width	mm	730	830	930	1.040	1.165	1.540	1.540	1.900
Depth	mm	1.000	1.010	1.030	1.160	1.230	1.580	1.580	1.940
Height	mm	1.417	1.560	1.700	1.850	1.920	1.970	1.970	2.290
Gross weight	kg	239	283	393	545	820	1.420	1.520	4.100

	UNIT.	DMS-11	DMS-14	DMS-18	DMS-27
DRUM					
Load capacity (kg) 1:9 / 1:10	Kg	11/10	14/13	20/18	28/25
Volume	I	100	130	180	250
Diameter	mm	620	620	700	770
Depth	mm	330	430	470	530
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	50/929	50/929	45/874	40/836
G Factor	-	300	300	300	300
Noise level	dB	< 70	< 70	< 70	< 70
Coin laundry version	-	YES	YES	YES	YES
Double drain	-	EXTOPT	EXTOPT	OPT.	OPT.
Weighing System	-	NO	NO	NO	NO
Tilting System		NO	NO	NO	NO
SLUICE option	-	NO	NO	NO	NO
DOOR					
Height center door / Height base door	r mm	570/310	570/310	655 / 348	700 / 400
Diameter	mm	373	373	460	460
POWER					
Motor	kW	1,1	1,1	2,2	3
Heating (Electric model)	kW	6	9	12	18
Max. power (Electric model)	kW	6,25	9,5	12,75	19
Max. power (Steam and HW model)	kW	1,1	1,1	2,2	3
CONNECTIONS					
Steam intake (steam mod.)	inch	1/2"	1/2"	1/2"	3/4"
Water intake	inch	3/4"	3/4"	3/4"	3/4"
Drain	inch	3"	3"	3"	3"
DIMENSIONS					
Width	mm	719	719	788	884
Depth	mm	684	830	840	1.011
Height	mm	1.158	1.158	1.307	1.340
Net weight	kg	217	239	281	340
PACKING DIMENSIONS					
Width	mm	800	800	840	930
Depth	mm	990	990	1.010	1.150
Height	mm	1.350	1.350	1.500	1.523
Gross weight	kg	225	247	301	370
Volume	m ³	1,07	1,07	1,3	1,6

*DOMUS reserves the right to modify the technical data without notice.

	OW SPIN				
DLS-11	DLS-14	DLS-18	DLS-27	DLS-36	DLS-60
11/10	14/13	20/18	28/25	39/35	67/60
100	130	180	250	350	600
620	620	700	770	860	1048
330	430	470	530	602	684
53/759	53/759	50/714	48/682	45/644	42,5/505
200	200	200	200	200	150
< 70	< 70	< 70	< 70	< 70	< 70
YES	YES	YES	YES	YES	YES
NO	OPT.	OPT.	OPT.	OPT.	OPT.
NO	NO	NO	NO	NO	NO
NO	NO	NO	NO	NO	NO
YES	YES	YES	YES	YES	NO
570/310	570/310		700 / 400		900 / 540
373	373	460	460	560	560
1,1	1,1	2,2	3	4	5,5
1,1 6	1,1 9	2,2 12	3 18	4 21	5,5 28,8
1,1 6 6,25	1,1 9 9,5	2,2 12 12,75	3 18 19	4 21 22	5,5 28,8 31,3
1,1 6	1,1 9	2,2 12	3 18	4 21	5,5 28,8
1,1 6 6,25 1,1	1,1 9 9,5 1,1	2,2 12 12,75 2,2	3 18 19 3	4 21 22 4	5,5 28,8 31,3 5,5
1,1 6 6,25 1,1 1/2"	1,1 9 9,5 1,1 1/2"	2,2 12 12,75 2,2 1/2"	3 18 19 3 3/4"	4 21 22 4 3/4"	5,5 28,8 31,3 5,5 3/4"
1,1 6 6,25 1,1 1/2" 3/4"	1,1 9 9,5 1,1	2,2 12 12,75 2,2	3 18 19 3	4 21 22 4	5,5 28,8 31,3 5,5
1,1 6 6,25 1,1 1/2"	1,1 9 9,5 1,1 1/2" 3/4"	2,2 12 12,75 2,2 1/2" 3/4"	3 18 19 3 3/4" 3/4"	4 21 22 4 3/4" 3/4"	5,5 28,8 31,3 5,5 3/4" 3/4"
1,1 6 6,25 1,1 1/2" 3/4" 3"	1,1 9 9,5 1,1 1/2" 3/4" 3"	2,2 12 12,75 2,2 1/2" 3/4" 3"	3 18 19 3 3 3/4" 3/4" 3"	4 21 22 4 3/4" 3/4" 3"	5,5 28,8 31,3 5,5 3/4" 3/4" 3/4"
1,1 6 6,25 1,1 1/2" 3/4"	1,1 9 9,5 1,1 1/2" 3/4"	2,2 12 12,75 2,2 1/2" 3/4"	3 18 19 3 3/4" 3/4"	4 21 22 4 3/4" 3/4"	5,5 28,8 31,3 5,5 3/4" 3/4"
1,1 6 6,25 1,1 1/2" 3/4" 3" 719	1,1 9 9,5 1,1 1/2" 3/4" 3" 719	2,2 12 12,75 2,2 1/2" 3/4" 3" 788	3 18 19 3 3/4" 3/4" 3" 884	4 21 22 4 3/4" 3/4" 3" 979	5,5 28,8 31,3 5,5 3/4" 3/4" 3" 1225
1,1 6 6,25 1,1 1/2" 3/4" 3" 719 684	1,1 9 9,5 1,1 1/2" 3/4" 3" 719 684	2,2 12 12,75 2,2 1/2" 3/4" 3" 788 840	3 18 19 3 3/4" 3/4" 3" 884 965	4 21 22 4 3/4" 3" 979 1.066	5,5 28,8 31,3 5,5 3/4" 3/4" 3" 1225 1.279
1,1 6 6,25 1,1 1/2" 3/4" 3" 719 684 1.158	1,1 9 9,5 1,1 1/2" 3/4" 3" 719 684 1.158	2,2 12 12,75 2,2 1/2" 3/4" 3" 788 840 1.307	3 18 19 3 3/4" 3/4" 3/4" 3" 884 965 1.340	4 21 22 4 3/4" 3/4" 3" 979 1.066 1.411	5,5 28,8 31,3 5,5 3/4" 3/4" 3/4" 1225 1.225 1.279 1.640
1,1 6 6,25 1,1 1/2" 3/4" 3" 719 684 1.158	1,1 9 9,5 1,1 1/2" 3/4" 3" 719 684 1.158	2,2 12 12,75 2,2 1/2" 3/4" 3" 788 840 1.307	3 18 19 3 3/4" 3/4" 3/4" 3" 884 965 1.340	4 21 22 4 3/4" 3/4" 3" 979 1.066 1.411	5,5 28,8 31,3 5,5 3/4" 3/4" 3/4" 1225 1.225 1.279 1.640
1,1 6 6,25 1,1 1/2" 3/4" 3" 719 684 1.158 217	1,1 9 9,5 1,1 1/2" 3/4" 3" 719 684 1.158 239	2,2 12 12,75 2,2 1/2" 3/4" 3" 788 840 1.307 281	3 18 19 3 3/4" 3/4" 3" 884 965 1.340 340	4 21 22 4 3/4" 3/4" 3" 979 1.066 1.411 473	5,5 28,8 31,3 5,5 3/4" 3/4" 3" 1225 1.279 1.640 930
1,1 6 6,25 1,1 1/2" 3/4" 3" 719 684 1.158 217 800	1,1 9 9,5 1,1 1/2" 3/4" 3" 719 684 1.158 239 800	2,2 12 12,75 2,2 1/2" 3/4" 3" 788 840 1.307 281 840	3 18 19 3 3/4" 3/4" 3" 884 965 1.340 340 930	4 21 22 4 3/4" 3/4" 3" 979 1.066 1.411 473 1.050	5,5 28,8 31,3 5,5 3/4" 3/4" 3" 1225 1.279 1.640 930 1.360
1,1 6 6,25 1,1 1/2" 3/4" 3" 719 684 1.158 217 800 990	1,1 9 9,5 1,1 1/2" 3/4" 3" 719 684 1.158 239 800 990	2,2 12 12,75 2,2 1/2" 3/4" 3" 788 840 1.307 281 840 1.010	3 18 19 3 3/4" 3/4" 3" 884 965 1.340 340 930 1.150	4 21 22 4 3/4" 3/4" 3" 979 1.066 1.411 473 1.050 1.250	5,5 28,8 31,3 5,5 3/4" 3/4" 3/4" 3" 1225 1.279 1.640 930 1.360 1.480





Utilaje Alimentare Profesionale Bdul Biruintei, nr. 49 / 077145 Judetul Ilfov Oras Pantelimon ROMANIA Tel. +40 021 350 20 34



CE