



**GASTRONOMIE
SI BRUTARIE
PROFESIONALA**

TOP-K

The text 'TOP-K' is written in a bold, blue, sans-serif font. Below the text is a green brushstroke graphic that tapers to the right, giving it a dynamic, hand-painted appearance.





ST *Bakery*




ST BAKERY 604 SERIES

4x600x400





STB 604 M

Reference	710489
Internal dimensions	(W)710 x (D)500 X (H)390 mm.
External dimensions	(W)880 x (D)905 X (H)670 mm.
 Electric power	7.500 W
 Maximum temperature	250°
 Weight	90 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
4 Trays capacity	600x400 / GN 1/1
Distance between trays	80 mm.


Transverse tray position



STB 604 V7

Reference	710490
Internal dimensions	(W)710 x (D)500 X (H)390 mm.
External dimensions	(W)880 x (D)905 X (H)670 mm.
 Electric power	7.500 W
 Maximum temperature	270°
 Weight	92 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	optional
Removable core probe	optional
Change door opening	
4 Trays capacity	600 x 400 / GN 1/1
Distance between trays	80 mm.





Transverse tray position




ST BAKERY 606 SERIES

6x600x400





STB 606 M

Reference	710491
Internal dimensions	(W)710 x (D)500 X (H)550 mm.
External dimensions	(W)880 x (D)935 X (H)835 mm.
 Electric power	10.500 W
 Maximum temperature	250°
 Weight	108 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
6 Trays capacity	600x400 / GN 1/1
Distance between trays	80 mm.

Transverse tray position



STB 606 V7

Reference	710492
Internal dimensions	(W)710 x (D)500 X (H)550 mm.
External dimensions	(W)880 x (D)935 X (H)835 mm.
 Electric power	10.650 W
 Maximum temperature	270°
 Weight	110 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	optional
Removable core probe	optional
Change door opening	
6 Trays capacity	600 x 400 / GN 1/1
Distance between trays	80 mm.



Transverse tray position




ST BAKERY 606 SERIES

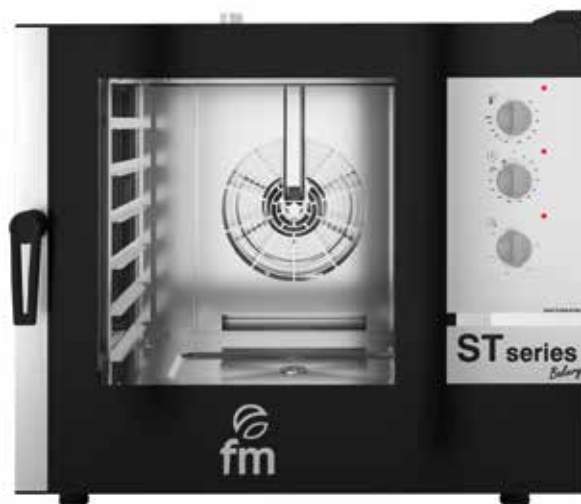

6x600x400

STB 606 M GAS





Reference	710493
Internal dimensions	(W)710 x (D)500 X (H)550 mm.
External dimensions	(W)880 x (D)935 X (H)835 mm.
 Electric power	650 W
 Maximum temperature	250°
 Weight	130 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas Power	14 kW - 12040 kcal/h
6 Trays capacity	600x400 / GN 1/1
Distance between trays	80 mm.


 Premix gas burners

Transverse tray position




STB 606 V7 GAS

Reference	710494
Internal dimensions	(W)710 x (D)500 X (H)550 mm.
External dimensions	(W)880 x (D)935 X (H)835 mm.
 Electric power	650 W
 Maximum temperature	270°
 Weight	135 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas power	14 KW - 12040 kcal/h
Automatic washing	optional
Removable core probe	optional
Change door opening	
6 Trays capacity	600x400 / GN 1/1
Distance between trays	80 mm.

 Premix gas burners





Transverse tray position




ST BAKERY 610 SERIES

10x600x400





STB 610 M

Reference	710495
Internal dimensions	(W)710 x (D)500 X (H)875 mm.
External dimensions	(W)880 x (D)935 X (H)1155 mm.
 Electric power	15.600 W
 Maximum temperature	250°
 Weight	150 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
10 Trays capacity	600x400 / GN 1/1
Distance between trays	80 mm.


Transverse tray position



STB 610 V7

Reference	710496
Internal dimensions	(W)710 x (D)500 X (H)875 mm.
External dimensions	(W)880 x (D)935 X (H)1155 mm.
 Electric power	15.600 W
 Maximum temperature	270°
 Weight	155 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	optional
Removable core probe	optional
Change door opening	
10 Trays capacity	600 x 400 / GN 1/1
Distance between trays	80 mm.





Transverse tray position




ST BAKERY 610 SERIES


10x600x400

STB 610 M GAS





Reference	710497
Internal dimensions	(W)710 x (D)500 X (H)875 mm.
External dimensions	(W)880 x (D)1050 X (H)1155 mm.
 Electric power	650 W
 Maximum temperature	250°
 Weight	140 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas power	20 kW - 17200 kcal/h
10 Trays capacity	600x400 / GN 1/1
Distance between trays	80 mm.


 Premix gas burners

Transverse tray position




STB 610 V7 GAS

Reference	710498
Internal dimensions	(W)710 x (D)500 X (H)875 mm.
External dimensions	(W)880 x (D)1050 X (H)1155 mm.
 Electric power	650 W
 Maximum temperature	270°
 Weight	150 Kg.
 Voltage	230 V - 50/60Hz
Connection	Single phase
Gas power	20 kW - 17200 kcal/h
Automatic washing	optional
Removable core probe	optional
Change door opening	
10 Trays capacity	600 x 400 / GN 1/1
Distance between trays	80 mm.

 Premix gas burners





Transverse tray position




ST BAKERY 616 SERIES

16x600x400

STB 616 ET

Reference	710499
Internal dimensions	(W)700 x (D)500 X (H)1480 mm.
External dimensions	(W)880 x (D)960 X (H)1865 mm.
 Electric power	26.250 W
 Maximum temperature	250°
 Weight	252 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Trolley	Yes
16 Trays capacity	600 x 400
Distance between trays	86 mm.





Transverse tray position




ST BAKERY 616 SERIES

16x600x400





STB 616 V7 T


Reference	710500
Internal dimensions	(W)700 x (D)500 X (H)1480 mm.
External dimensions	(W)880 x (D)960 X (H)1865 mm.
 Electric power	26.250 W
 Maximum temperature	270°
 Weight	252 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	optional
Removable core probe	optional
Trolley	Yes
Change door opening	
16 Trays capacity	600 x 400
Distance between trays	86 mm.

Transverse tray position



STB 616 V7 T GAS

Reference	710501
Internal dimensions	(W)700 x (D)500 X (H)1480 mm.
External dimensions	(W)880 x (D)1010 X (H)1865 mm.
 Electric power	1.300 W
 Maximum temperature	270°
 Weight	288 Kg.
 Voltage	230V-50/60Hz
Connection	Single phase
Gas power	28 kW - 24080 Kcal/h
Automatic washing	optional
Removable core probe	optional
Trolley	Yes
Change door opening	
16 Trays capacity	600 x 400
Distance between trays	80 mm.

 Premix gas burners





Transverse tray position



ST BAKERY 6/86 SERIES


6x800x600

STB 6/86 V7





Reference	710502
Internal dimensions	(An)710 x (F)900 X (Al)550 mm.
External dimensions	(An)880 x (F)1335 X (Al)835 mm.
 Electric power	14.650 W
 Maximum temperature	270°
 Weight	140 Kg.
 Voltage	400 V - 3L + N 50/60Hz
Connection	Trifásica 3F + N + T
Automatic washing	opcional
Removable core probe	opcional
Change door opening	
6 Trays capacity	800 x 600 / (12) 600X400
Distance between trays	80 mm.




Longitudinal tray position




STB 6/86 V7 GAS

Reference	710503
Internal dimensions	(W)710 x (D)900 X (H)550 mm.
External dimensions	(W)880 x (D)1335 X (H)835 mm.
 Electric power	650 W
 Maximum temperature	270°
 Weight	155 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas power	20 kW- 17200 kcal/h
Automatic washing	optional
Removable core probe	optional
Change door opening	
6 Trays capacity	800 x 600 / (12) 600x400
Distance between trays	80 mm.



 Premix gas burners





Longitudinal tray position




ST BAKERY 10/86 SERIES

10x800x600





STB 10/86 V7


Reference	710504
Internal dimensions	(W)710 x (D)900 X (H)875 mm.
External dimensions	(W)880 x (D)1308 X (H)1155 mm.
 Electric power	29.300 W
 Maximum temperature	270°
 Weight	180 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	optional
Removable core probe	optional
Change door opening	
10 Trays capacity	800x600 / (20) 600x400
Distance between trays	80 mm.

Longitudinal tray position




STB 10/86 V7 GAS

Reference	710505
Internal dimensions	(W)710 x (D)900 X (H)875 mm.
External dimensions	(W)880 x (D)1050 X (H)1155 mm.
 Electric power	650 W
 Maximum temperature	270°
 Weight	195 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas Power	28 kW - 24080 kcal/h
Automatic washing	optional
Removable core probe	optional
Change door opening	
10 Trays capacity	800x600 / (20) 600x400
Distance between trays	80 mm.

 Premix gas burners





Longitudinal tray position




ST BAKERY 18/86 SERIES

18x800x600





STB 18/86 V7 T


Reference	710506
Internal dimensions	(W)710 x (D)920 X (H)1480 mm.
External dimensions	(W)880 x (D)1270 X (H)1865 mm.
 Electric power	40.000 W
 Maximum temperature	270°
 Weight	320 Kg.
 Voltage	400 V - 3L + N 50/60 Hz
Connection	Three phase 3F + N + T
Automatic washing	optional
Removable core probe	optional
Trolley	Yes
Change door opening	
18 Trays capacity	800x600
Distance between trays	80 mm.

Longitudinal tray position



STB 18/86 V7 GAS T

Reference	710507
Internal dimensions	(W)710 x (D)920 X (H)1480 mm.
External dimensions	(W)880 x (D)1420 X (H)1865 mm.
 Electric power	1.300 W
 Maximum temperature	270°
 Weight	360 Kg.
 Voltage	230V - 50/60Hz
Connection	Single phase
Gas power	38 kW - 32675 kcal/h
Automatic washing	optional
Removable core probe	optional
Trolley	Yes
Change door opening	
18 Trays capacity	800 x 600
Distance between trays	80 mm.

 Premix gas burners

Longitudinal tray position

